


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 24.89 lm/W
MODEL	120D 2835	I <sub>max</sub> (cd)	115.3	S/MH (C0/180)	1.27	
NOMINAL POWER(W)	15	LOR (%)	100.0	S/MH (C90/270)	1.19	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	349.15	□ UP, DN (C0-180)	1.7, 52.5	
NOMINAL FLUX(lm)	2.90958	CIE CLASS	DIRECT	□ UP, DN (C180-360)	1.3, 44.5	
LAMPS INSIDE	120	□ up (%)	3.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	97.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

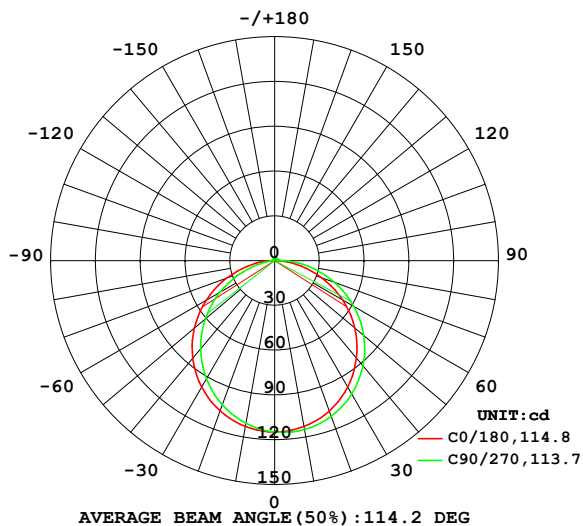

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

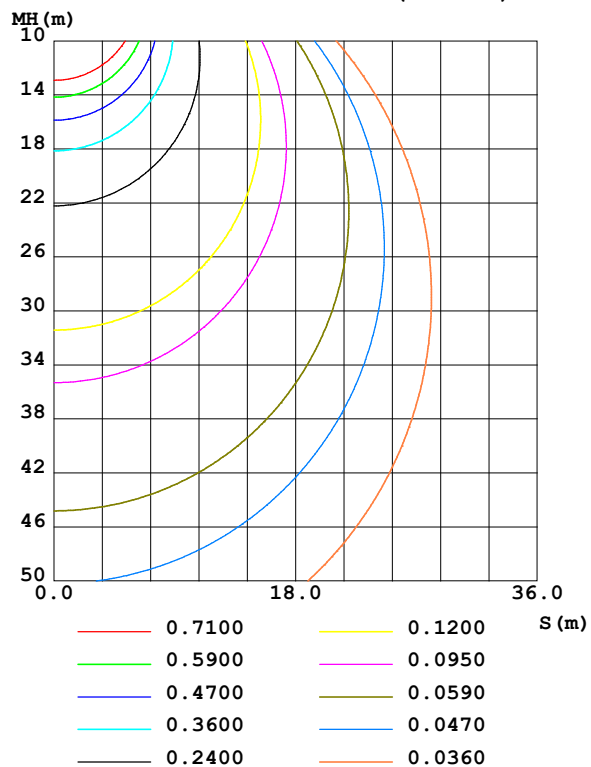

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: YSL  
Test Date: 2021-07-02

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	112.9	114.1	114.9	114.2	112.8	111.6	110.7	111.5	0- 10	10.86	10.86	3.11,3.11
20	107.2	109.6	111.0	109.7	107.1	104.7	102.7	104.3	10- 20	31.16	42.03	12,12
30	97.84	101.3	103.3	101.5	97.82	94.27	91.38	93.69	20- 30	47.37	89.40	25.6,25.6
40	85.30	89.68	92.07	89.87	85.38	80.85	77.15	80.03	30- 40	57.38	146.8	42,42
50	70.05	75.15	77.91	75.33	70.23	64.93	60.61	63.88	40- 50	59.97	206.8	59.2,59.2
60	52.59	58.22	61.30	58.43	52.82	46.99	42.24	45.73	50- 60	54.84	261.6	74.9,74.9
70	33.50	39.38	42.76	39.64	33.81	27.74	23.01	26.36	60- 70	42.58	304.2	87.1,87.1
80	14.94	19.96	23.32	20.16	15.29	9.875	6.750	8.787	70- 80	25.29	329.5	94.4,94.4
90	2.641	5.095	6.850	5.154	2.877	2.698	1.869	2.417	80- 90	9.209	338.7	97,97
100	0.3247	2.762	2.179	2.515	0.2837	2.265	1.582	1.999	90-100	2.792	341.5	97.8,97.8
110	0.5437	2.535	1.977	2.208	0.4750	1.786	1.422	1.622	100-110	1.890	343.4	98.3,98.3
120	0.7558	2.240	1.896	1.831	0.6847	1.363	1.311	1.330	110-120	1.507	344.9	98.8,98.8
130	0.9448	1.971	1.855	1.615	0.8668	1.099	1.199	1.156	120-130	1.226	346.1	99.1,99.1
140	1.102	1.756	1.841	1.526	1.028	1.077	1.189	1.141	130-140	1.027	347.1	99.4,99.4
150	1.238	1.621	1.828	1.414	1.178	1.165	1.221	1.228	140-150	0.8399	348.0	99.7,99.7
160	1.369	1.555	1.762	1.441	1.337	1.281	1.305	1.349	150-160	0.6399	348.6	99.8,99.8
170	1.507	1.552	1.546	1.550	1.491	1.446	1.443	1.490	160-170	0.4114	349.0	100,100
180	1.609	1.585	1.587	1.603	1.634	1.602	1.594	1.605	170-180	0.1469	349.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 182.95 lm

%lum = 52.4%

%lamp = 52.4%

Conical surface Flux(120deg): 261.59 lm

%lum = 74.9%


%lamp = 74.9%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:YSL  
Test Date:2021-07-02

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

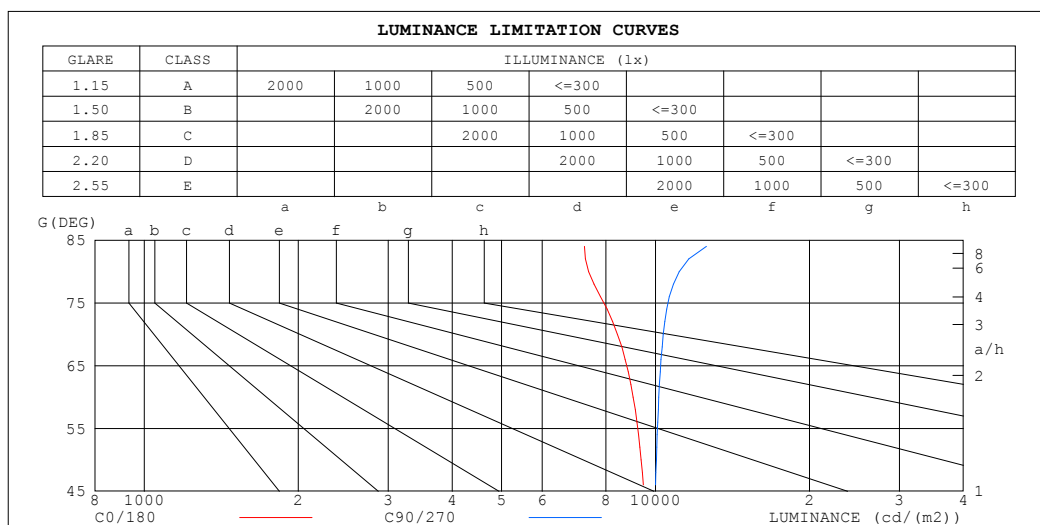

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8709	15090
80	7400	11120
75	8559	11203
70	8423	10351
65	9177	10595
60	9043	10151
55	9490	10327
50	9370	10036
45	9666	10156


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: YSL  
Test Date: 2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97														
1.0	1.03	.98	.94	1.00	.96	.92	.95	.92	.89	.91	.88	.86	.87	.85	.83	.80														
2.0	.89	.82	.76	.87	.81	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.66														
3.0	.78	.70	.63	.76	.69	.62	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56														
4.0	.69	.60	.53	.67	.59	.53	.65	.57	.52	.62	.56	.51	.59	.54	.50	.47														
5.0	.62	.52	.46	.60	.52	.45	.58	.50	.45	.55	.49	.44	.53	.48	.43	.41														
6.0	.55	.46	.40	.54	.46	.40	.52	.45	.39	.50	.43	.38	.48	.42	.38	.36														
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31														
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28														
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.37	.31	.27	.25														
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.24	.23														

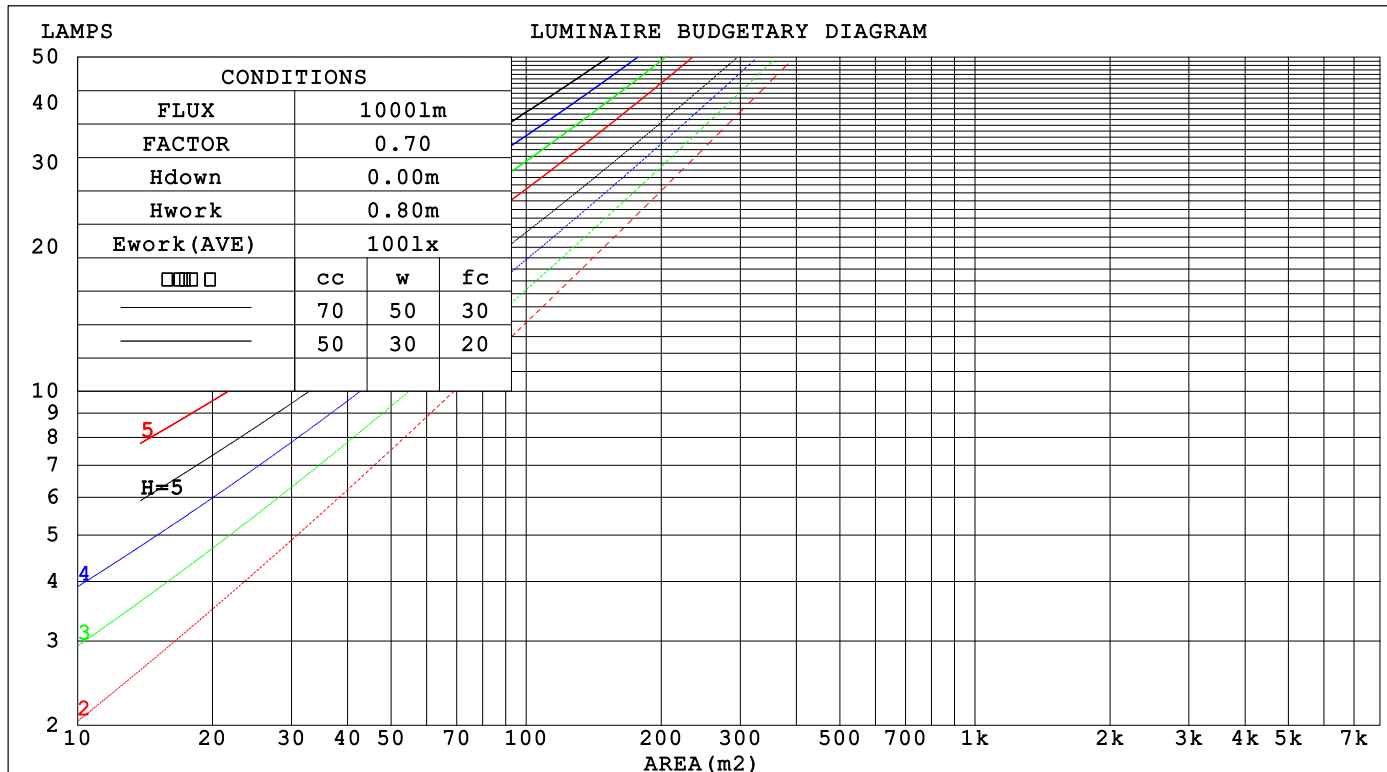

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:YSL  
Test Date:2021-07-02

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.320 .182 .058	.312 .178 .057	.297 .170 .054	.283 .163 .052	.270 .157 .051	
2.0	.297 .163 .050	.290 .160 .049	.277 .154 .048	.265 .148 .046	.253 .143 .045	
3.0	.273 .146 .044	.267 .143 .043	.255 .138 .042	.244 .134 .041	.234 .130 .040	
4.0	.252 .131 .038	.246 .129 .038	.235 .125 .037	.226 .121 .037	.216 .118 .036	
5.0	.232 .118 .034	.227 .117 .034	.218 .113 .033	.209 .110 .033	.201 .107 .032	
6.0	.215 .108 .031	.210 .106 .031	.202 .103 .030	.194 .101 .030	.187 .098 .029	
7.0	.200 .099 .028	.196 .097 .028	.188 .095 .027	.181 .093 .027	.174 .090 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.169 .086 .025	.163 .084 .024	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.159 .080 .023	.154 .078 .023	
10.0	.164 .079 .022	.161 .078 .022	.155 .076 .021	.150 .074 .021	.145 .073 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.213 .213 .213	.182 .182 .182	.124 .124 .124	.071 .071 .071	.023 .023 .023	
1.0	.204 .179 .157	.175 .154 .135	.119 .106 .093	.069 .061 .054	.022 .020 .018	
2.0	.196 .155 .121	.168 .134 .104	.115 .092 .073	.066 .054 .043	.021 .017 .014	
3.0	.188 .138 .097	.162 .119 .084	.111 .082 .059	.064 .048 .035	.021 .016 .011	
4.0	.181 .124 .081	.155 .108 .071	.107 .075 .050	.062 .044 .029	.020 .014 .010	
5.0	.173 .114 .070	.149 .099 .061	.103 .069 .043	.059 .041 .026	.019 .013 .008	
6.0	.166 .106 .063	.143 .092 .054	.099 .064 .039	.057 .038 .023	.018 .012 .008	
7.0	.159 .099 .057	.137 .086 .049	.095 .060 .035	.055 .035 .021	.018 .012 .007	
8.0	.153 .093 .052	.132 .081 .046	.091 .057 .032	.053 .034 .019	.017 .011 .006	
9.0	.147 .088 .049	.126 .077 .043	.088 .054 .030	.051 .032 .018	.017 .010 .006	
10.0	.141 .084 .046	.122 .073 .040	.084 .051 .029	.049 .030 .017	.016 .010 .006	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:YSL  
Test Date:2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 硅胶1220					TYPE: 3000K 15W			WEIGHT:			
SPEC.: 0					DIM.:			SERIAL No.: 1			
MFR.:					SUR.: 0.012*1			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.4	25.9	24.7	26.2	26.4	24.8	26.3	25.1	26.6	26.9	
	26.0	27.4	26.4	27.7	28.0	26.7	28.1	27.0	28.4	28.7	
	26.7	28.0	27.0	28.3	28.6	27.5	28.8	27.9	29.1	29.5	
	27.1	28.4	27.5	28.7	29.0	28.3	29.5	28.6	29.8	30.2	
	27.3	28.5	27.7	28.8	29.2	28.6	29.8	29.0	30.1	30.5	
	27.4	28.6	27.8	28.9	29.3	28.9	30.0	29.3	30.4	30.7	
4H	2H	25.2	26.5	25.5	26.8	27.1	25.5	26.8	25.8	27.1	27.4
	3H	27.0	28.1	27.4	28.5	28.8	27.5	28.7	27.9	29.0	29.4
	4H	27.7	28.8	28.2	29.2	29.6	28.5	29.6	28.9	29.9	30.3
	6H	28.4	29.3	28.8	29.7	30.1	29.4	30.3	29.8	30.7	31.2
	8H	28.6	29.5	29.0	29.9	30.3	29.8	30.7	30.2	31.1	31.5
	12H	28.8	29.6	29.2	30.0	30.5	30.2	31.0	30.6	31.4	31.9
8H	4H	28.1	29.0	28.6	29.4	29.9	28.8	29.7	29.3	30.1	30.5
	6H	29.0	29.7	29.4	30.1	30.6	29.9	30.6	30.4	31.1	31.6
	8H	29.3	29.9	29.8	30.4	30.9	30.4	31.1	30.9	31.5	32.1
	12H	29.5	30.1	30.1	30.6	31.1	30.9	31.5	31.5	32.0	32.5
12H	4H	28.2	29.0	28.7	29.4	29.9	28.8	29.6	29.3	30.1	30.5
	6H	29.1	29.7	29.6	30.2	30.7	30.0	30.6	30.5	31.1	31.6
	8H	29.5	30.0	30.0	30.5	31.1	30.6	31.1	31.1	31.6	32.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 349.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.7)  
Area: 0.012 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:YSL  
Test Date:2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	54	43	37	30
0.80	66	54	47	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	80	70	63	77	68	62	54
1.50	86	76	69	84	75	68	81	73	67	59
2.00	93	84	78	91	83	77	87	80	75	66
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	93	88	98	92	86	94	88	84	75
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	105	100	96	100	96	93	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: YSL  
Test Date: 2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

# ISOCANDELA DIAGRAM

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

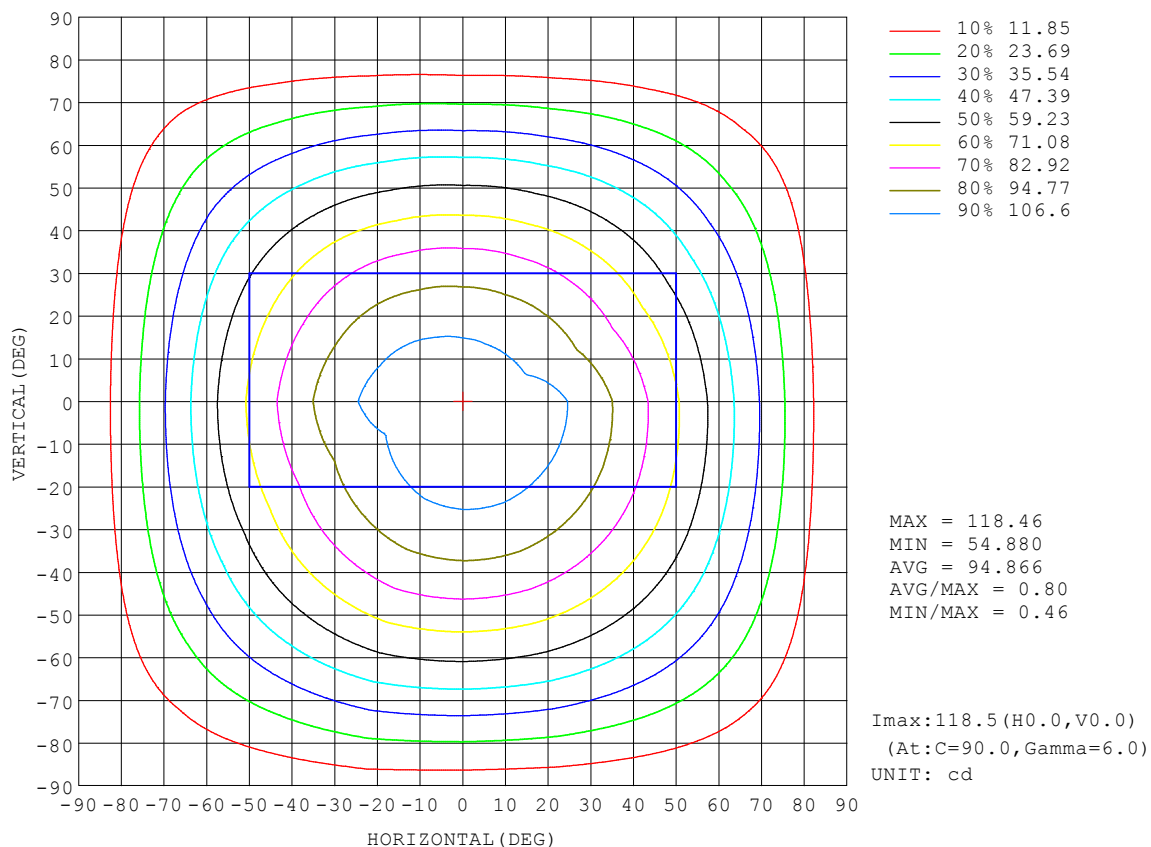


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:YSL  
 Test Date:2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:



AAI Figure

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

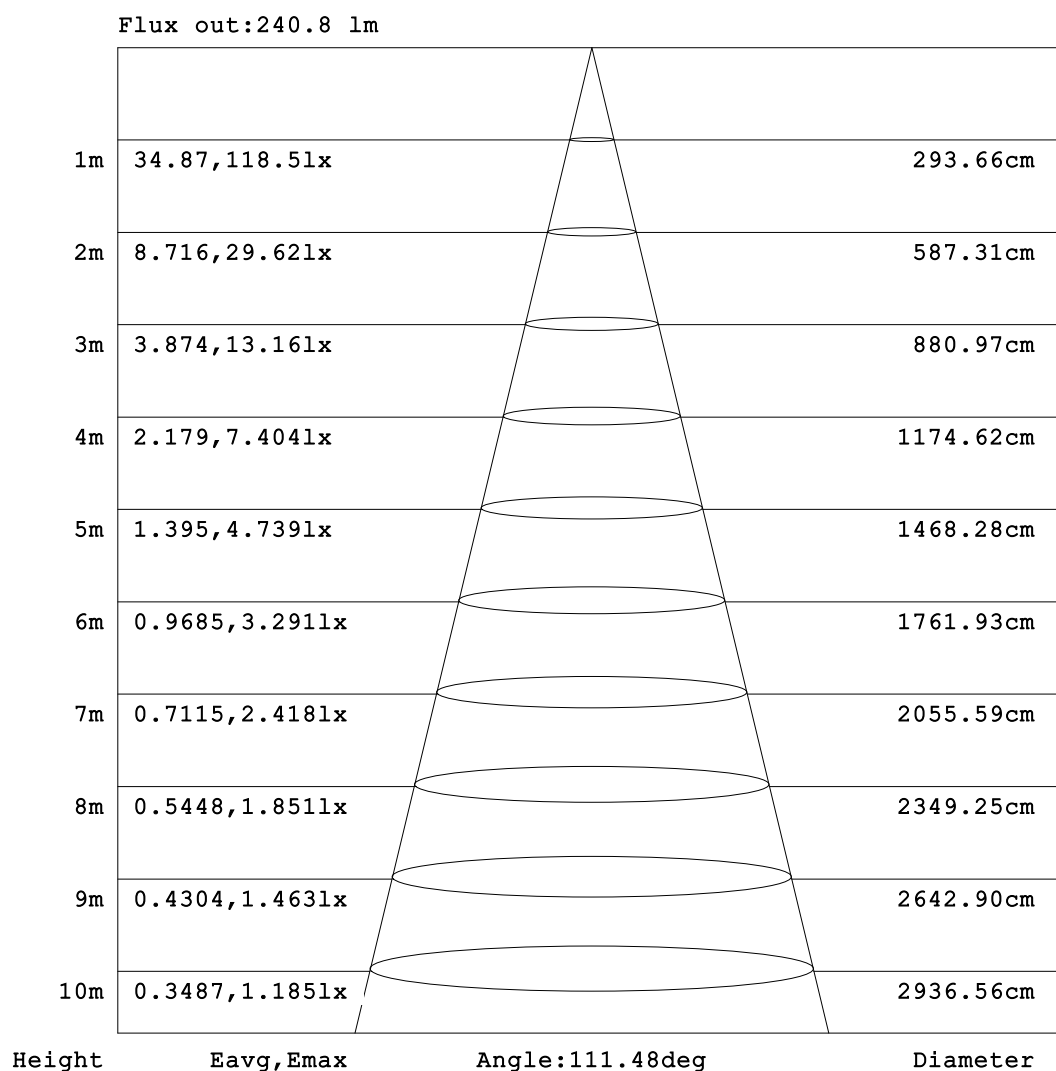


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:YSL  
 Test Date:2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

# ISOLUX DIAGRAM

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

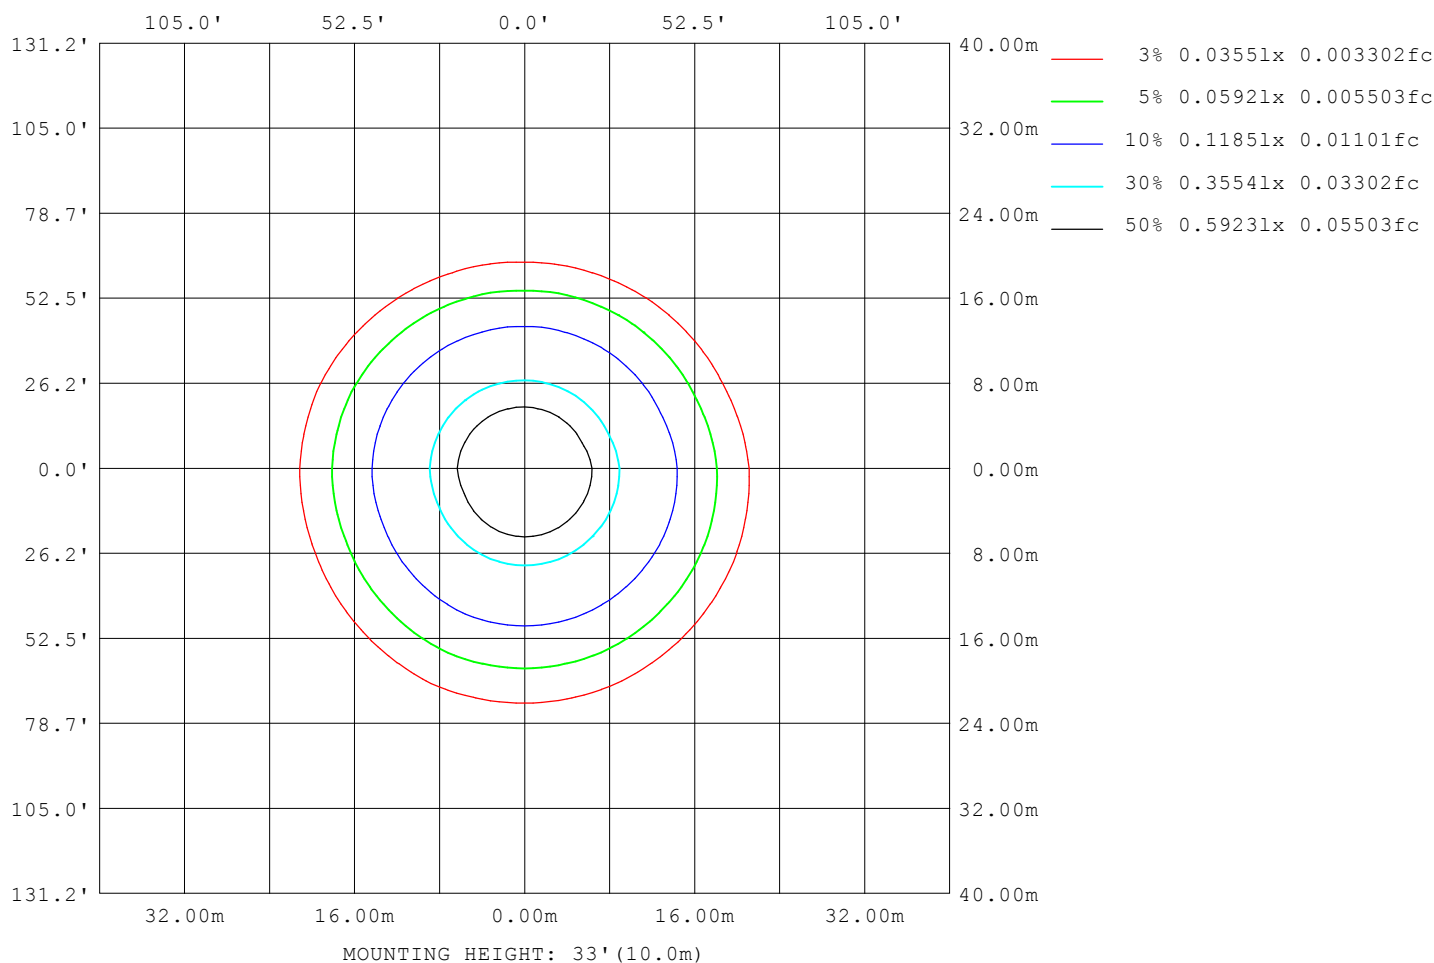

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:YSL  
Test Date:2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8542
L_0~180 (75) av	7750
L_0~180 (85) av	7500
L_90~270 (65) av	8365
L_90~270 (75) av	7574
L_90~270 (85) av	8106
L_45 (65) av	8469
L_45 (75) av	7618
L_45 (85) av	7344

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: YSL  
 Test Date: 2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

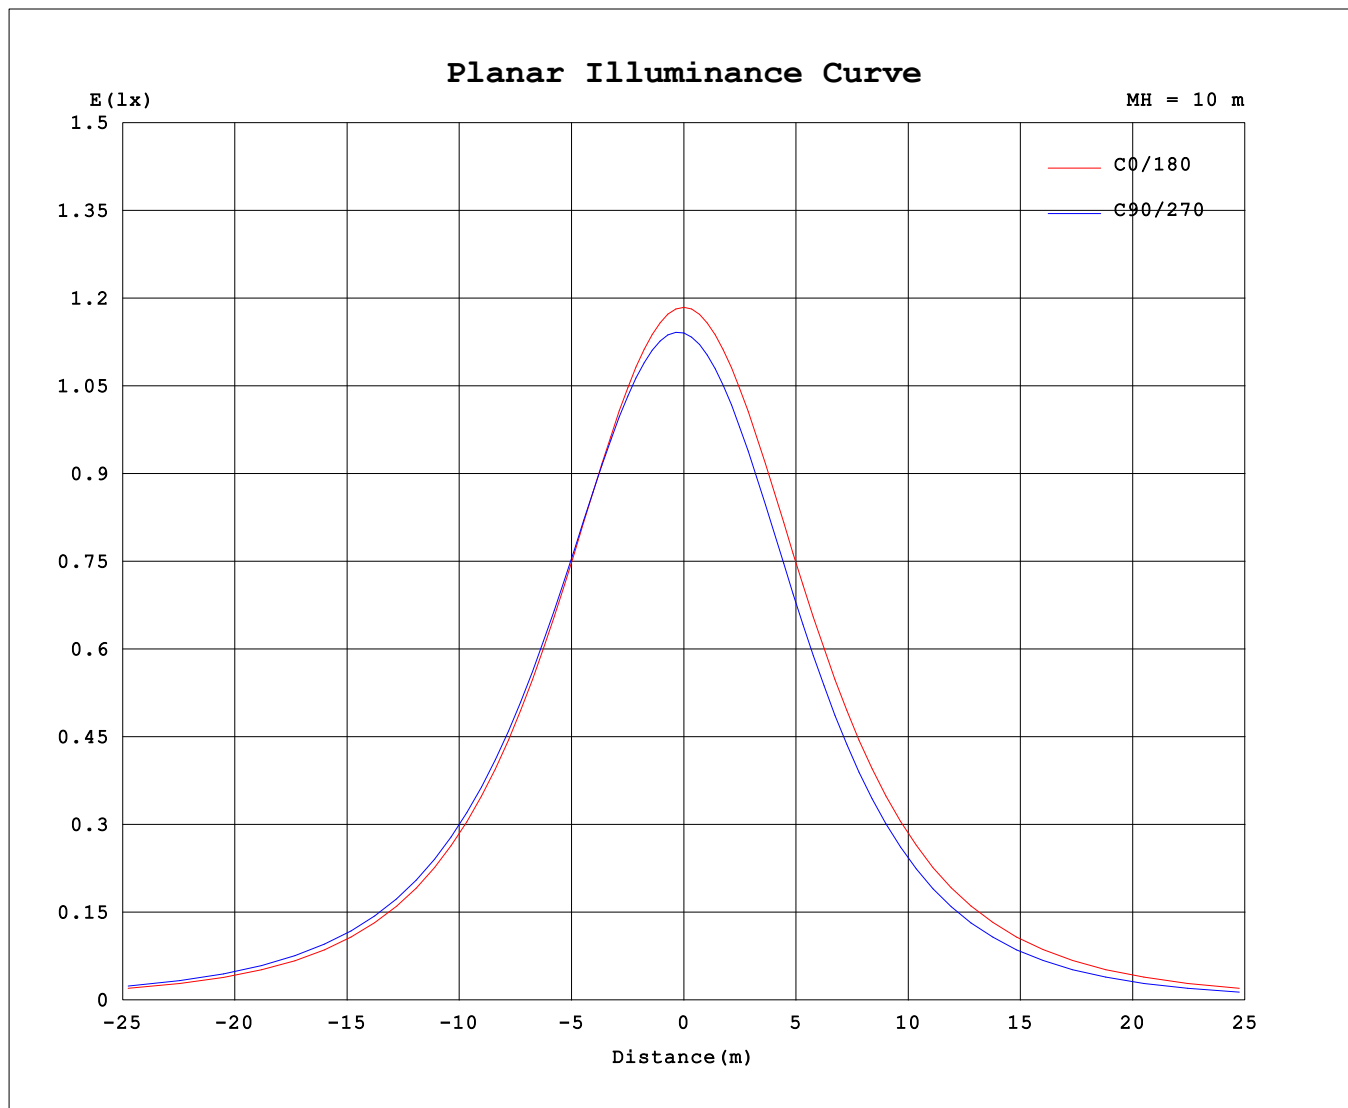

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: YSL  
Test Date: 2021-07-02

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 硅胶1220	TYPE: 3000K 15W	WEIGHT:
SPEC.: 0	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.012*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	115	115	115	115	115	115	115	115	115	115	115	115	115	115	115	115			
5	115	115	115	115	115	115	115	115	114	114	114	114	114	114	114	114			
10	113	114	114	115	115	115	114	114	113	112	112	111	111	111	111	112			
15	111	112	113	113	114	114	113	112	111	110	109	108	108	108	109	110			
20	107	109	110	111	111	111	110	108	107	106	105	103	103	103	104	106			
25	104	106	107	108	108	108	107	105	104	102	101	99.3	98.6	99.0	100	102			
30	97.8	99.9	101	103	103	103	101	99.8	97.8	95.9	94.3	92.3	91.4	91.9	93.7	95.7			
35	93.2	95.5	97.0	98.6	99.2	99.0	97.2	95.4	93.2	91.0	89.2	87.0	86.0	86.6	88.5	90.8			
40	85.3	87.9	89.7	91.5	92.1	91.9	89.9	87.8	85.4	82.9	80.9	78.3	77.1	77.9	80.0	82.6			
45	79.5	82.3	84.2	86.1	86.7	86.6	84.4	82.2	79.6	77.0	74.8	72.1	70.8	71.5	73.8	76.5			
50	70.1	73.1	75.1	77.2	77.9	78.0	75.3	73.1	70.2	67.7	64.9	62.0	60.6	61.4	63.9	66.8			
55	63.3	66.5	68.6	70.8	71.5	71.7	68.8	66.4	63.5	61.2	58.0	54.9	53.4	54.3	56.8	59.9			
60	52.6	56.0	58.2	60.5	61.3	61.5	58.4	55.9	52.8	50.9	47.0	43.8	42.2	43.1	45.7	49.0			
65	45.1	48.6	50.9	53.2	54.1	54.2	51.1	48.4	45.4	43.5	39.4	36.2	34.6	35.5	38.1	41.4			
70	33.5	36.9	39.4	41.9	42.8	42.9	39.6	36.8	33.8	31.9	27.7	24.6	23.0	23.9	26.4	29.7			
75	25.8	29.0	31.6	34.1	35.0	35.2	31.8	28.9	26.2	24.1	20.1	17.2	15.7	16.5	18.8	21.9			
80	14.9	17.4	20.0	22.4	23.3	23.5	20.2	17.3	15.3	13.3	9.88	7.86	6.75	7.34	8.79	11.2			
85	8.83	10.5	12.8	15.1	15.9	16.0	13.0	10.3	9.55	7.61	5.12	4.00	3.29	3.66	4.43	5.79			
90	2.64	3.79	5.10	6.40	6.85	6.94	5.15	3.50	2.88	4.24	2.70	2.27	1.87	2.04	2.42	2.87			
95	0.23	2.95	3.23	3.55	3.60	3.69	3.09	2.55	0.21	3.97	2.51	2.11	1.73	1.86	2.23	2.65			
100	0.32	2.76	2.76	2.47	2.18	2.36	2.52	2.26	0.28	2.58	2.27	1.94	1.58	1.70	2.00	2.14			
105	0.41	2.57	2.67	2.36	2.04	2.23	2.39	2.03	0.35	1.58	2.06	1.83	1.51	1.60	1.84	1.49			
110	0.54	2.18	2.54	2.27	1.98	2.15	2.21	1.68	0.48	1.09	1.79	1.63	1.42	1.49	1.62	1.11			
115	0.63	1.91	2.42	2.21	1.95	2.08	2.07	1.57	0.56	0.89	1.60	1.55	1.38	1.42	1.49	0.92			
120	0.76	1.59	2.24	2.11	1.90	1.96	1.83	1.18	0.68	0.79	1.36	1.40	1.31	1.33	1.33	0.83			
125	0.83	1.46	2.13	2.05	1.88	1.90	1.70	1.24	0.76	0.78	1.23	1.34	1.27	1.28	1.25	0.82			
130	0.94	1.38	1.97	1.98	1.85	1.85	1.62	1.29	0.87	0.87	1.10	1.25	1.20	1.23	1.16	0.91			
135	1.01	1.35	1.89	1.93	1.85	1.75	1.57	1.26	0.93	0.92	1.07	1.18	1.19	1.21	1.12	0.98			
140	1.10	1.36	1.76	1.88	1.84	1.66	1.53	1.19	1.03	1.00	1.08	1.15	1.19	1.20	1.14	1.06			
145	1.16	1.37	1.69	1.85	1.84	1.64	1.48	1.23	1.09	1.05	1.10	1.16	1.19	1.21	1.18	1.12			
150	1.24	1.40	1.62	1.79	1.83	1.57	1.41	1.28	1.18	1.14	1.16	1.20	1.22	1.23	1.23	1.21			
155	1.29	1.42	1.59	1.73	1.82	1.54	1.40	1.34	1.24	1.20	1.20	1.24	1.25	1.26	1.27	1.26			
160	1.37	1.45	1.55	1.64	1.76	1.50	1.44	1.42	1.34	1.30	1.28	1.28	1.30	1.31	1.35	1.36			
165	1.43	1.48	1.55	1.60	1.64	1.50	1.48	1.47	1.40	1.36	1.34	1.34	1.36	1.36	1.40	1.42			
170	1.51	1.52	1.55	1.58	1.55	1.53	1.55	1.55	1.49	1.46	1.45	1.43	1.44	1.44	1.49	1.51			
175	1.56	1.57	1.55	1.57	1.56	1.56	1.58	1.59	1.56	1.52	1.51	1.49	1.51	1.50	1.54	1.56			
180	1.61	1.62	1.59	1.59	1.59	1.58	1.60	1.63	1.63	1.60	1.60	1.58	1.59	1.58	1.61	1.62			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:YSL

Test Date:2021-07-02

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: